


including hydraulic, electric and engine pump units

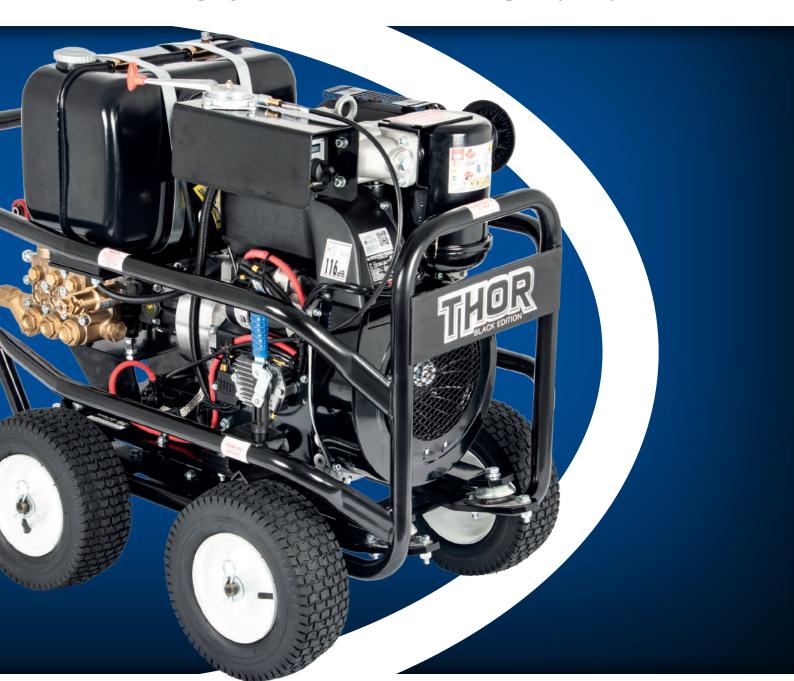

www.phillipspressurewashers.co.uk

LC - Series - direct & gearbox drive
GP - Series - direct drive 4 10 to 13 Lpm - 150 Bar
Evolution 1 - direct drive
Evolution 2 - gearbox drive
Evolution 3 - gearbox drive
Evolution Electric Start 9 12 to 21 Lpm - 150 to 250 Bar
Cobra - direct drive
Delta - gearbox drive
Rapier - heavy-duty - gearbox drive
THOR Black Edition - gearbox drive
JET - Drain Jetting - gearbox drive
Hydraulic Driven
DPM Engine Pump Units 16 - 17 12 to 50 Lpm - 130 to 500 Bar
Wheelbarrow Tank
Electric Driven

- direct drive & gearbox drive

	12	125
E	Lpm	Bar
<u></u>	-biii	Dui

Part No.	Engine	PSI	Kg
LCF12125PLR	Loncin G200F-P5	1812	31
Dimensions 500L x 370W x 445H (mm)			

- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated carry frame
- Two-piece lance assembly
- 8m high pressure hose
- 3m suction hose & filter





Part No.	Engine	PSI	Kg	
LCT9160PLR	Loncin G200F-P5	2320	35	
Dimensions 650L x 515W x 930H (mm)				

- Direct drive 3400 Rpm axial pump
- Integrated controlset & bypass
- Integrated chemical tank & injector
- Powder-coated trolley with 11" wheels
- Two-piece lance assembly
- 8m high pressure hose
- Garden quick coupler inlet





ROL	12	125
Е	Long	Rar

Part No.	Engine	PSI	Kg	
LCT12125PLR	Loncin G200F-P5	1812	36	
Dimensions 650L x 515W x 930H (mm)				

Unit does not self prime and must be mains fed

- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical tank & injector
- Powder-coated trolley with 11" wheels
- Two-piece lance assembly
- 8m high pressure hose
- 3m suction hose & filter





Powered by

٦L		
E	16	200
-	Lpm	Bar
•	-	

Part No.	Engine	PSI	Kg
LCT16200PLR	Loncin G390F-P5	2900	60
Dimensions 855L x 625W x 1055H (mm)			

- Interpump 58 series pump
- 3400 Rpm direct drive pump
- Interpump controlset & bypass
- Integrated chemical injector
- Powder-coated trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m suction hose & filter



ROL	15	250
PET	Lpm	Bar

Part No.	Engine	PSI	Kg
LCT15250PLR	Loncin G420F-P5	3626	73
Dimensions 855L x 625W x 1055H (mm)			

- Interpump 59 series pump
- 1450 Rpm gearbox drive
- Return to tank unloader valve
- External chemical injector
- Easy prime ball valve

- Powder-coated trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter





SERIES - direct drive



Tpm Lpm	150 Bar
---------	------------

Part No.	Engine	PSI	Kg
GF10150PHR	Honda GP160	2175	31
Dimensions 500L x 370W x 445H (mm)			

- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated carry frame
- Two-piece lance assembly
- 8m high pressure hose
- 3m suction hose & filter





9	13	150
00	13	190
	Lpm	Bar
I	-piii	Dai
-		

Part No.	Engine	PSI	Kg
GF13150PHR	Honda GP200	2175	31
Dimension	s 500L x 370W x 4	145H (mı	m)

- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated carry frame
- Two-piece lance assembly
- 8m high pressure hose
- 3m suction hose & filter





ETROL	10 Lpm	150 Bar
PE	Lpm	bar

Part No.	Engine	PSI	Kg
GT10150PHR	Honda GP160	2175	36
Dimension	s 635L x 510W x 9	50H (mr	n)

- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated trolley 10" wheels
- Two-piece lance assembly
- 8m high pressure hose
- 3m suction hose & filter

HONDA





Part No.	Engine	PSI	Kg
GT13150PHR	Honda GP200	2175	37
Dimension	s 635L x 510W x 9	950H (mr	m)

- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated trolley 10" wheels
- Two-piece lance assembly
- 8m high pressure hose
- 3m suction hose & filter

Evolution¹ - direct drive

			Part No.	Engine	PSI	Kg
1 6	10	135	E1F10135PHR	Honda GX160	1958	31.2
PETROL	Lpm	Bar	Dimensions	s 500L x 370W x 4	145H (mr	m)
Ä			Part No.	Engine	PSI	Kg
6	12	150	E1F12150PHR	Honda GX160	2175	31.2
PETROL	Lpm	Bar	Dimensions 500L x 370W x 445H (mm)			
Ä			Part No.	Engine	PSI	Kg
6	13	150	E1F13150PHR	Honda GX200	2175	31.2
PETROL	Lpm	Bar	Dimensions	s 500L x 370W x 4	145H (mr	m)





- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated carry frame
- Two-piece lance assembly
- 8m high pressure hose
- 3m suction hose & filter

۲			Part No.	Engine	PSI	Kg
6	12	150	E1T12150PHR	Honda GX160	2175	42.8
PET	Lpm	Bar	Dimension	s 630L x 530W x 8	310H (mı	m)
۲			Part No.	Engine	PSI	Kg
ROL	13	150	Part No. E1T13150PHR	Engine Honda GX200	PSI 2175	Kg 43.8

- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated trolley 10" wheels
- Two-piece lance assembly
- 8m high pressure hose
- 3m suction hose & filter



ı	POWERED by
ı	HONDA
ı	

닞			P
8	13	200	E1T1
E	Lpm	Bar	
Δ	•		

Part No.	Engine	PSI	Kg
E1T13200PHR	Honda GX240	2900	59
Dimensions	s 800L x 640W x 8	340H (mı	m)

- Interpump 58 series pump
- 3400 Rpm direct drive pump
- Return to head unloader valve
- External chemical injector
- Easy prime ball valve

- Powder-coated trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter



PETROL	15 Lpm	275 Bar	
PETROL	16 Lpm	200 Bar	

Part No.	Engine	PSI	Kg
E1T15275PHR	Honda GX390	3990	65.5
Dimensions	s 800L x 640W x 8	340H (mı	m)
Part No.	Engine	PSI	Kg
	Engine Honda GX340	PSI 2900	Kg 65.5

- Interpump 58 series pump
- 3400 Rpm direct drive pump
- Return to head unloader valve
- External chemical injector
- Easy prime ball valve

- Powder-coated trolley 13" wheels
- Heavy-duty twin lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter





Evolution¹ - direct drive



TROL	20 Lpm	200 Bar
PE	Lpm	Dar

Part No.	Engine	PSI	Kg
E1T20200PHR	Honda GX390	2900	65.5
Dimensions 800L x 640W x 840H (mm)			

- Interpump 59 series pump
- 3400 Rpm direct drive pump
- Return to head unloader valve
- External chemical injector
- Easy prime ball valve

- Powder-coated trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter





ŠEL	12	125
DIESEL	12 Lpm	125 Bar

Part No.	Engine	PSI	Kg
E1T12125DYR	Yanmar L48V	1812	48.5
Dimensions 630L x 530W x 810H (mm)			

- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated trolley 10" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter





13	170
Lpm	Bar

Part No.	Engine	PSI	Kg
E1T13170DYR	Yanmar L70V	2465	69
Dimensions 800L x 640W x 840H (mm)			

- Interpump 58 series pump
- 3400 Rpm direct drive pump
- Return to head unloader valve
- External chemical injector
- Easy prime ball valve

- Powder-coated trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m Heavy-duty suction hose & filter

Evolution² - gearbox drive



2 14 150 Lpm Bar

Part No.	Engine	PSI	Kg
E2T14150PHR	Honda GX200	2175	38
Dimensions 630L x 530W x 810H (mm)			

- Interpump 58 series pump
- 1450 Rpm gearbox drive
- Interpump controlset with bypass
- Integrated chemical injector
- Powder-coated trolley 10" wheels
- Two-piece lance assembly
- 10m high pressure hose
- 3m heavy-duty suction hose & filter



Evolution² - gearbox drive

크		Part No.	Engine	PSI	Kg
2 15	200	E2T15200PHR	Honda GX340	2900	64.5
15 Lpm	Lpm Bar Dimensions 800L x 640W x 840H (mm)				
_		Part No.	Engine	PSI	Kg
2 15	250	E2T15250PHR	Honda GX390	3626	64.5
15 Lpm	Bar	Dimensions 800L x 640W x 840H (mm)			
_		Part No.	Engine	PSI	Kg
21	200	E2T21200PHR	Honda GX390	2900	64.5
21 Lpm	Bar	Dimensions 800L x 640W x 840H (mm)			
		Part No.	Engine	PSI	Kg
Hg 15	150	E2T15150DYR	Yanmar L70V	2175	75.5





- - Dimensions 800L x 640W x 840H (mm) Interpump 59 series pump
- 1450 Rpm gearbox drive
- Return to tank unloader valve External chemical injector
- Easy prime ball valve
- Powder-coated trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter

Powered by YANMA

PETROL	15 Lpm	250 Bar


Part No.	Engine	PSI	Kg
SS2T15250PHR	Honda GX390	3626	64.5
Dimensions 800L x 640W x 840H (mm)			m)

ROL	21	200
PET	Lpm	Bar

Part No.	Engine	PSI	Kg
SS2T21200PHR	Honda GX390	2900	64.5
Dimensions 800L x 640W x 840H (mm)			

- Interpump 59 series pump
- 1450 Rpm gearbox drive
- Return to tank unloader valve
- External chemical injector
- Easy prime ball valve
- Stainless steel trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter





	-		Part No.	Engine	PSI	Kg	
12	15	200	E3T15200PHR	Honda GX340	2900	77	
15 200 Lpm Bar		Bar	Dimensions 1100L x 620W x 700H (mm)				
Ä	Part No. Engine PSI K						
	15	E3T15250PHR Honda GX390		3625	78.5		
PETROL	Lpm	Bar	Dimensions	1100L x 620W x	700H (m	ım)	
			Part No.	Engine	PSI	Kg	
TROL	04	200					
Œ	21	200	E3T21200PHR	Honda GX390	2900	79	
PET	Lpm	Bar	Dimensions 1100L x 620W x 700H (mm)				



POWERED BY **HOND**A

- Interpump 59 series pump
- 1450 Rpm gearbox drive
- Return to tank unloader valve
- External chemical injector
- Easy prime ball valve
- Heavy-duty trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter

olution³ heavy-duty - gearbox drive Electric



H		
2	15	400
6	Lpm	Bar
죠		

Part No.	Engine	PSI	Kg	
E3T15400PBE B&S 18HP V-Twin		5800	113	
Dimensions 1100L x 620W x 790H (mm)				



Part No.	Engine	PSI	Kg	
E3T15500PBE	B&S 23HP V-Twin	7250	115	
Dimensions 1100L x 620W x 790H (mm)				

- Powered by
- BRIGGS&STRATTON
- Interpump 66HP series pump
- 1450 Rpm gearbox drive
- Electric start with battery
- Interpump unloader valve
- Interpump safety valve
- Heavy-duty trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter



23 250 Lpm Bar

Part No.	Engine	PSI	Kg
E3T23250PBE	B&S 18HP V-Twin	3625	108.5
Dimensions 1100L x 620W x 790H (mm)			

25	300
Lpm	Bar

Part No.	Engine	PSI	Kg		
E3T25300PBE	B&S 23HP V-Twin	4350	110		
Dimensions 1100L x 620W x 790H (mm)					

Powered by



- Interpump 66HP series pump
- 1450 Rpm gearbox drive
- Electric start with battery
- Flow sensitive unloader valve
- Interpump safety valve
- Heavy-duty trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter



ROL	30	200
PET	Lpm	Bar

Part No.	Engine	PSI	Kg	
E3T30200PBE	B&S 18HP V-Twin	2900	108.5	
Dimensions 1100L x 620W x 790H (mm)				

TROL	41 Lpm	200 Bar
ä	_p	

Part No.	Engine	PSI	Kg	
E3T41200PBE	B&S 23HP V-Twin	2900	110	
Dimensions 1100L x 620W x 790H (mm)				

Powered by



- Interpump 66 series pump
- 1450 Rpm gearbox drive
- Electric start with battery

200 Bar

- Flow sensitive unloader valve
- Fitted with pulsation dampener
- Heavy-duty trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter
- Optional twin outlet kit p/n 204-1015



- - 20 190 .pm Bar

15

Part No.	Engine	PSI	Kg		
E3T15200DYE	Yanmar L100V	2900	108.5		
Dimensions 1100L x 620W x 720H (mm)					

Engine

E3T20190DYE Yanmar L100V Dimensions 1100L x 620W x 720H (mm)

- Interpump 59 series pump
 - 1450 Rpm gearbox drive
 - Electric start with battery
 - Return to tank unloader valve
 - External chemical injector
- Easy prime ball valve
- Heavy-duty trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter



Electric Start Evolution - direct drive

O F	12	150
H		
PE	Lpm	Bar

Part No.	Engine	PSI	Kg		
E1T12150PHE	Honda GX160	2175	40		
Dimensions 800L x 640W x 840H (mm)					

- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Electric start with battery
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m suction hose & filter



Electric Start EVOIUTION² - gearbox drive

Part No.	Engine	PSI	Kg		
E2T14150PHE	Honda GX200	2175	42		
Dimensions 800L x 640W x 840H (mm)					

- Interpump 58 series pump
- 1450 Rpm gearbox drive
- Electric start with battery
- Return to tank unloader valve
- External chemical injector
- Easy prime ball valve
- Powder-coated trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter



HONDA

ROL	15	250
ETI	Lpm	Bar

Part No.	Engine	PSI	Kg
E2T15250PHE	Honda GX390	3626	66.5
Dimensions	s 800L x 640W x 8	340H (mı	m)

ROL	21	200
PET	Lpm	Bar

Part No.	Engine	PSI	Kg	
E2T21200PHE	Honda GX390	2900	66.5	
Dimensions 800L x 640W x 840H (mm)				

- Interpump 59 series pump
- 1450 Rpm gearbox drive
- Electric start with battery
- Return to tank unloader valve
- External chemical injector
- Easy prime ball valve
- Powder-coated trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter



HONDA

Electric Start EVOIUTION³ heavy-duty - gearbox drive

닐			Part No.	Engine	PSI	Kg
ROL	15	250	E3T15250PHE	Honda GX390	3626	81
PET	Lpm	Bar	Dimensions	1100L x 620W x	700H (m	m)
-						
			Part No.	Engine	PSI	Kg
ROL	21	200	Part No. E3T21200PHE	Engine Honda GX390	PSI 2900	Kg 81

- Interpump 59 series pump
- 1450 Rpm gearbox drive
- Electric start with battery
- Return to tank unloader valve
- External chemical injector
- Easy prime ball valve
- Heavy-duty trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m heavy-duty suction hose & filter



Cobra - direct drive



10 135 Lpm Bar	PETROL	0	
-------------------	--------	---	--

Part No.	Engine	PSI	Kg		
CF10135PHR	Honda GX160	1958	24		
Dimensions 500L x 370W x 445H (mm)					

- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated carry frame
- Two-piece lance assembly
- 8m high pressure hose
- 3m suction hose & filter







 Part No.
 Engine
 PSI
 Kg

 CF12150PHR
 Honda GX160
 2175
 31

 Dimensions 580L x 410W x 455H (mm)

- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated carry frame
- Two-piece lance assembly
- 8m high pressure hose
- 3m suction hose & filter





ROL	12	150
PET	Lpm	Bar

Part No.	Engine	PSI	Kg	
CT12150PHR	Honda GX160	2175	36	
Dimensions 635L x 510W x 950H (mm)				

- Interpump 51 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated trolley 10" wheels
- Two-piece lance assembly
- 8m high pressure hose
- 3m suction hose & filter





30L	13	200
PET	Lpm	Bar

Part No.	Engine	PSI	Kg
CT13200PHR	Honda GX240	2900	48
Dimensions	855L x 625W x 1	055H (m	m)

301	16	200
PET		Bar

Part No.	Engine	PSI	Kg	
CT16200PHR	Honda GX340	2900	55	
Dimensions 855L x 625W x 1055H (mm)				

- Interpump 63 series pump
- 3400 Rpm direct drive pump
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated trolley 13" wheels
- Two-piece lance assembly
- 10m high pressure hose
 - 3m suction hose & filter





ETROL	15 Lpm	250 Bar
<u>-</u>	-р	Da.

Part No.	Engine	PSI	Kg
CT15250PHR	Honda GX390	3625	60
RTT-C101	Fitted with return to tank bypass		

Dimensions 855L x 625W x 1055H (mm)

- Interpump 44 series pump
- 3400 Rpm direct drive pump
- Interpump controlset with bypass
- Integrated chemical injector
- Powder-coated trolley 13" wheels
- Two-piece lance assembly
- 10m high pressure hose
- 3m suction hose & filter



elta - gearbox drive

ETROL	12 Lpm	140 Bar
虿	•	

Part No.	Engine	PSI	Kg	
DT12140PHR	Honda GX160 2030 43			
RTT-D201	Fitted with return to tank bypass			
Dimensions 855L x 625W x 1055H (mm)				

_		
<u>o</u>	14	150
Ë		
Щ	Lpm	Bar
-		

Part No.	Engine	PSI	Kg
DT14150PHR	Honda GX200	2175	43
RTT-D203	Fitted with return to tank bypass		
5	0==1 00=14/		,

Dimensions 855L x 625W x 1055H (mm)

- Interpump 44 series pump
- 1450 Rpm gearbox drive
- Interpump controlset with bypass
- Integrated chemical injector
- Powder-coated trolley 13" wheels
- Two-piece lance assembly
- 10m high pressure hose
- 3m suction hose & filter





15	200
Lpm	Bar

Part No.	Engine	PSI	Kg
DT15200PHR	Honda GX340	2900	70
RTT-D204	RTT-D204 Fitted with return to tank bypass		
Dimensions 855L x 625W x 1055H (mm)			

- Interpump 47 series pump
- 1450 Rpm gearbox drive
- Interpump controlset with bypass
- Integrated chemical injector
- Powder-coated trolley 13" wheels
- Two-piece lance assembly
- 10m high pressure hose
- 3m suction hose & filter





<u>0</u>	15	250
Ë	Long	Bar
H	Lpm	Dar

Part No.	Engine	PSI	Kg
DT15250PHR	Honda GX390	3625	71
RTT-D205	Fitted with return to tank bypass		
Dimensions 855L x 625W x 1055H (mm)			

- Interpump 47 series pump
- 1450 Rpm gearbox drive
- Interpump controlset with bypass
- Integrated chemical injector
- Powder-coated trolley 13" wheels
- Two-piece lance assembly
- 10m high pressure hose
- 3m suction hose & filter





30 F	14	150
		Bar

Part No.	Engine	PSI	Kg
DF14150PHR	Honda GX200	2175	38
Dimensions 580L x 410W x 455H (mm)			

- Interpump 44 series pump
- 1450 Rpm gearbox drive
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated carry frame
- Two-piece lance assembly
- 10m high pressure hose
- 3m suction hose & filter





heavy-duty - gearbox drive



0	15	200
Ë	Long	Bar
	Lpm	Bar

Part No.	Engine	PSI	Kg
RT15200PHR	Honda GX340	2900	82
Dimensions 1100L x 620W x 700H (mm)			

- Interpump 47 series pump
- 1450 Rpm gearbox drive
- Return to tank unloader valve
- External chemical injector
- Easystart valve

- Heavy-duty trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m suction hose & filter







- Part No. **Engine** RT15250PHR Honda GX390 3625 Dimensions 1100L x 620W x 700H (mm)
- Interpump 47 series pump
- 1450 Rpm gearbox drive
- Return to tank unloader valve
- External chemical injector
- Easystart valve

- Heavy-duty trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m suction hose & filter





30L	21	170
PET	Lpm	Bar

Part No.	Engine	PSI	Kg
RT21170PHR	Honda GX390	2465	82
Dimensions 1100L x 620W x 700H (mm)			

- Interpump 47 series pump
- 1450 Rpm gearbox drive
- Return to tank unloader valve
- External chemical injector
- Easystart valve

- Heavy-duty trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m suction hose & filter





냽	15	200
DIES	Lpm	Bar

Part No.	Engine	PSI	Kg
RT15200DYE	Yanmar L100V	2900	113
Dimensions 1100L x 620W x 720H (mm)			

- Interpump 47 series pump
- 1450 Rpm gearbox drive
- Electric start with battery
- Return to tank unloader valve
- External chemical injector
- Easystart valve
- Heavy-duty trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m suction hose & filter

Powered by YANMAR

Electric * Start



IESEL	21 Lpm	170 Bar
冒	Lpm	Bar

Part No. Engine PSI Kg							
RT21170DYE Yanmar L100V 2465 113							
Dimensions 1100L x 620W x 720H (mm)							

- Interpump 47 series pump
- 1450 Rpm gearbox drive
- Electric start with battery
- Return to tank unloader valve
- External chemical injector
- Easystart valve
- Heavy-duty trolley 13" wheels
- Heavy-duty single lance
- 10m high pressure hose
- 3m suction hose & filter

Powered by YANMAR





ultra heavy-duty - gearbox drive

Electric Start

- Interpump 66 series pump
- Hatz 2G40 diesel engine
- Gearbox drive with Vibroflex coupling
- Super heavy-duty trolley with brake
- 21 litre fuel tank for all day running
- Electric start with 16 Ah pure lead dry cell battery
- Fuel cut-off solenoid for ignition key shut-down
- Ignition panel with digital hour meter and warning lights

41 200 Lpm Bar

Part No. Engine PSI Kg						
TBE41200DHE Hatz 2G40 2900 204						
Dimensions 1190L x 680W x 875H (mm)						

- Interpump W2141 66 series pump
- Interpump K1 flow sensitive unloader valve
- Twin outlet for dual operator use
- Interpump safety valve
- Pulsation dampener
- Heavy duty lance assembly
- Supplied with 4m suction hose & filter
- 10m high pressure hose







25	300
Lpm	Bar

Part No. Engine PSI Kg					
BE25300DHE	300DHE Hatz 2G40 4350 206				
Dimensions 1190L x 680W x 875H (mm)					

- Interpump W3025 66 series pump
- Interpump K9 flow sensitive unloader valve
- Interpump safety valve
- Heavy duty lance assembly
- Supplied with 4m suction hose & filter
- 10m high pressure hose



Powered by

HATZ







18	400
Lpm	Bar

Part No. Engine PSI Kg						
TBE18400DHE Hatz 2G40 5800 208						
Dimensions 1190L x 680W x 875H (mm)						

- Interpump W4018 66HP series pump
- Interpump K9 flow sensitive unloader valve
- Interpump safety valve
- Heavy duty lance assembly
- Supplied with 4m suction hose & filter
- 10m high pressure hose

_				



Powered by





Lpm Bar	IESEL	15 Lpm	500 Bar
---------	-------	-----------	------------

Part No.	Engine	PSI	Kg
TBE15500DHE	Hatz 2G40	7250	206
Dimensions	1190L v 680W v	, 875H (r	mm)

- Interpump W5015 66HP series pump
- PA VB16 soft start unloader valve
- Interpump safety valve
- Heavy duty lance assembly
- Supplied with 4m suction hose & filter
- 10m high pressure hose









A key feature of machines with our unique Vibroflex torsional drive coupling. Located in between the engine and gearbox it eliminates the highly damaging on-off stresses & snatch effect that can occur when a conventional hollow to solid shaft drive system is used.



Drain Jetting Units

- drain jetting units - gearbox drive



10	0	105
H	30	125
PE	Lpm	Bar

Part No.	Engine	PSI	Kg			
JET30125PHR	Honda GX390	1812	97.5			
Dimensions 1100L x 620W x 960H (mm)						

- Interpump 47 series pump
- 1450 Rpm gearbox drive
- Return to tank unloader valve
- Easystart valve
- Heavy-duty trolley 13" wheels
- Hose reel with 40m DN10 thermoplastic flexible jetting hose
- DRAINET jetting nozzle
- Inline jetting trigger w/ 2x 3m HP hoses for remote operation
- QR fittings for multiple set up options
- Heavy-duty pressure wash lance
- 10m high pressure hose
- 3m suction hose & filter



YANMA

Electric 1

30 100 Bar

Part No.	Engine	PSI	Kg				
JET30100DYE	Yanmar L100V	1450	128.5				
Dimensions 1100L x 620W x 960H (mm)							

- Interpump 47 series pump
- 1450 Rpm gearbox drive
- Electric start with battery
- Return to tank unloader valve
- Easystart valve
- Heavy-duty trolley 13" wheels
- Hose reel with 40m DN10 thermoplastic flexible jetting hose
- DRAINET jetting nozzle
- Inline jetting trigger w/ 2x 3m HP hoses for remote operation
- QR fittings for multiple set up options
- Heavy-duty pressure wash lance
- 10m high pressure hose
- 3m suction hose & filter

Skid Mount Drain Jetting Engine Pump Units

battery & leads



Tbm	125
30	Bar

Part No.	Engine	PSI	Kg				
E100-1046	Honda GX390	1812	69				
Dimensions 720L x 460W x 500H (mm)							

- Interpump 47 series pump & gearbox
- Honda petrol engine oil alert & recoil start
- Heavy skid with dampening rubbers
- Unloader valve with return to tank bypass
- Not supplied with Inline suction filter

- Easystart valve
- Inlet 3/4" hose barb
- Outlet 3/8" BSP F thread
- Bypass 15mm hose barb
- 60°C max fluid temperature



30 100 Bar

Part No.	Engine	PSI	Kg				
E100-1047	Yanmar L100V	1450	84				
Dimensions 720L x 440W x 553H (mm)							

- Interpump 47 series pump & gearbox
- Yanmar diesel engine electric start
- Heavy skid with dampening rubbers
- Unloader valve with return to tank bypass
- Inline suction filter

- Easystart valve
- Inlet 3/4" hose barb
- Outlet 3/8" BSP F thread
- Bypass 15mm hose barb
- 60°C max fluid temperature

Hydraulic Driven Pressure Washers

Hypro 1800 Series - 11.4 to 15 Lpm - 100 to 140 Bar

		Water	Pump	Hydraul		
	Part No.	Bar	Lpm	Lpm	Bar	Kg
HYDRAULIC	HPW100	100	11.4	30	131	12
HYDR	HPW140	140	15	32	138	15



- Hypro 1800 series pump
- Cast iron hydraulic motor
- VRF2 controlset & chemical injector
- Thermal relief valve
- Two piece twin lance assembly
- 10m high pressure hose
- 1/2" inlet, 3/4" outlet motor ports
- 3/4" F inlet, AR2 QR outlet pump ports

Interpump 63 Series HYPACK - 16 Lpm - 170 Bar

		Water Pump Hydraulic Motor			Hydraulic Motor			
ULIC	Part No.	Bar	Lpm	RPM	Cylinder Displacement	Lpm	Bar	Kg
HYDRA	HPW16170	170	16	1750	14 cm³/rev	27	140	12.5

- Interpump UL1716I-HY14 HYPACK mpu
- 63 series pump Forged brass manifold
- Return to head unloader valve
- Galtech bi-directional gear motor
- Two-piece lance assembly
- 10m high pressure hose
- 3m heavy-duty suction hose & filter

Interpump 59 Series HYPACK - 15 to 20 Lpm - 250 Bar

		Water Pump Hydraulic Motor			Hydraulic Motor			
OLIC	Part No.	Bar	Lpm	RPM	Cylinder Displacement	Lpm	Bar	Kg
ORAI	HPW15250	250	15	1450	26 am ³ /ray	42	130	15
Ħ		250	20	1950	26 cm ³ /rev	56.5	130	15

- Interpump E3B2515I-HY26 HYPACK mpu
- 59 series pump Nickel plated brass manifold
- Return to head unloader valve
- Galtech bi-directional gear motor
- Two-piece lance assembly
- 10m high pressure hose
- 3m heavy-duty suction hose & filter



Interpump 47 Series HYPACK - 30 to 36 Lpm - 150 Bar

		Water Pump Hydraulic Motor				Hydraulic Motor		
RAULIC	Part No.	Bar	Lpm	RPM	Cylinder Displacement	Lpm	Bar	Kg
ORA		150	30	1450	26 cm ³ /rev	42	150	21
HPW30150	150	36	1750	20 cm/lev	50.5	150	21	

- Interpump WS1630I-HY26 HYPACK mpu
- 47 series pump Forged brass manifold
- Return to tank unloader valve
- Galtech bi-directional gear motor
- Two-piece lance assembly
- 10m high pressure hose
- 3m heavy-duty suction hose & filter



Engine Pump Units

DPM Engine Pump Units



Petrol - 140 to 150 Bar - 12 to 14 Lpm

Part No.	Bar	Lpm	Engine	Pump Model	Kg		
E100-1001	140	12	Honda GX160	W140	37		
E100-1002	150	14	Honda GX200	W154	37		
Dimensions 625L x 400W x 360H mm							

- Interpump 44 series pump & gearbox
- Honda petrol engine oil alert & recoil start
- Baseplate mounted
- Unloader valve with return-to-tank bypass
- Inline suction filter

- Inlet 3/4" hose barb
- Outlet 3/8" BSP female thread
- Bypass 15mm hose barb
- 60°C max fluid temperature



Petrol - 200 to 250 Bar - 15 to 21 Lpm

Part No.	Bar	Lpm	Engine	Pump Model	Kg		
E100-1013	200	21	Honda GX390	E3B2121M	61		
E100-1014	250	15	Honda GX390	E3B2515M	61		
Dimensions 720L v 460W v 500H mm							

- Interpump 59 series pump & gearbox
- Honda petrol engine oil alert & recoil start
- Heavy-duty skid with dampening rubbers
- Unloader valve with return-to-tank bypass
- Inline suction filter

- Inlet 3/4" hose barb
- Outlet 3/8" BSP female thread
- Bypass 15mm hose barb
- 60°C max fluid temperature



Petrol - 170 to 250 Bar - 15 to 21 Lpm

Part No.	Bar	Lpm	Engine	Pump Model	Kg	
E100-1010	170	21	Honda GX390	WS202	69	
E100-1011	200	15	Honda GX340	WS201	64	
E100-1012	250	15	Honda GX390	WS251	69	
Dimensions 720L x 460W x 500H mm						

- Interpump 47 series pump & gearbox
- Honda petrol engine oil alert & recoil start
- Heavy-duty skid with dampening rubbers
- Unloader valve with return-to-tank bypass
- Inline suction filter

- Easystart valve
- Inlet 3/4" hose barb
- Outlet 3/8" BSP female thread
- Bypass 15mm hose barb
- 60°C max fluid temperature



Petrol - 130 to 500 Bar - 15 to 50 Lpm

	Part No.	Bar	Lpm	Engine	Pump Model	Kg	
	E100-1024	130	41	B&S 18HP V-Twin	W2141	90	
	E100-1023	150	35	B&S 18HP V-Twin	W2035	90	
	E100-1029	150	50	B&S 23HP V-Twin	W1550	94	
	E100-1020*	200	30	B&S 18HP V-Twin	W2030	90	
	E100-1025*	200	41	B&S 23HP V-Twin	W2141	92	
	E100-1021	250	23	B&S 18HP V-Twin	W3523	90	
	E100-1028	250	25	B&S 23HP V-Twin	W2525	92	
	E100-1026	300	25	B&S 23HP V-Twin	W3025	92	
1	E100-1033	350	21	B&S 23HP V-Twin	W3521	92	
	E100-1022	400	15	B&S 18HP V-Twin	W4015	90	
	E100-1027	500	15	B&S 23HP V-Twin	W5015	92	
	Dimensions 830L x 500W x 600H mm						
	* Also available with twin outlet for dual operator use						

- Interpump 66 series pump & gearbox
- Briggs & Stratton petrol engine electric start
- Heavy-duty skid with dampening rubbers
- Unloader valve with return-to-tank bypass
- Inline suction filter
- Safety valve
- 60°C max fluid temperature

Engine Pump Units

Diesel - 150 Bar - 15 Lpm

Part No.	Bar	Lpm	Engine	Pump Model	Kg	
E100-1031	150	15	Yanmar L70V	E3B1515M	66	
Dimensions 750L x 430W x 510H mm						

- Interpump 59 series pump & gearbox
- Yanmar diesel engine recoil start
- Heavy-duty skid with dampening rubbers
- Unloader valve with return to tank bypass
- Inline suction filter

- Inlet 3/4" hose barb
- Outlet 3/8" BSP female thread
- Bypass 1/2" hose barb
- 60°C max fluid temperature



Diesel - 170 to 200 Bar - 15 to 21 Lpm

Part No.	Bar	Lpm	Engine	Pump Model	Kg	
E100-1042	170	21	Yanmar L100V	WS202	84	
E100-1043 200 15 Yanmar L100V WS201 84					84	
Dimensions 720L x 440W x 553H mm						

- Interpump 47 series pump & gearbox
- Yanmar L100V, electric start
- Heavy-duty skid with dampening rubbers
- Unloader valve with return-to-tank bypass
- Inline suction filter

- Easystart valve
- Inlet 3/4" hose barb
- Outlet 3/8" BSP female thread
- Bypass 1/2" hose barb
- 60°C max fluid temperature



battery & leads

Vibroflex

Diesel - 200 to 500 Bar - 15 to 41 Lpm

Part No.	Bar	Lpm	Engine	Pump Model	Kg	
TS41200DHE [†]	200	41	Hatz 2G40 with Vibroflex	W2141	174	
TS25300DHE	300	25	Hatz 2G40 with Vibroflex	W3025	174	
TS18400DHE	400	18	Hatz 2G40 with Vibroflex	W4018	174	
TS15500DHE [‡] 500 15 Hatz 2G40 with Vibroflex W5015 1				174		
† twin outlet for dual operator use, ‡3/4" hose barb inlet						
Dimensions 1050L x 630W x 710H mm						

- New Thor Black Edition design
- Digital ignition panel with hour meter
- Fuel cut-off solenoid for ignition key shut-down
- 7L fuel tank

- Interpump 66 series pump
- Gearbox drive & Vibroflex coupling
- Hatz 2G40 electric start with battery
- Heavy-duty skid with AV rubbers



Not supplied with lance & hoses

Engine pump units not supplied with lance and hoses

Wheelbarrow Tank Mounted Pressure Washers

Part No.	Bar	Lpm	Engine	PSI	Kg	
WBU8150P-LC	150	8	Loncin G200-F	2175	50	
Dimensions 1520L x 680W x 740H (mm)						

- Interpump 51 series pumps
- 3400 Rpm direct drive pump
- 120L wheelbarrow tank
- Solid puncture proof tyres
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated trolley
- Heavy-duty single lance
- 10m HP hose
- With inline & suction filters





Part No.	Bar	Lpm	Engine	PSI	Kg
WBU8200P	200	8	Honda GP200	2900	59
WBU8150P	150	8	Honda GP160	2175	58
Dimensions 1520Lx 680W x 740H (mm)					

- Interpump 51/63 series pumps
- 3400 Rpm direct drive pump
- 120L wheelbarrow tank
- Solid puncture proof tyres
- Integrated controlset & bypass
- Integrated chemical injector
- Powder-coated trolley
- Heavy-duty single lance
- 20m hose reel with 10m HP hose
- With inline & suction filters







INTERPUMP Electric Pressure Washers



Interpump Cleanmatic CL24V Electric Pressure Washer

7	90
Lpm	Bar

Part No.	Volts	kW	PSI	Kg			
CL24V	230	1.75	1305	11.4			
Dimensions 390L x 180W x 300H mm							

- Interpump axial pump
- Two piece lance assembly
- Variojet nozzle head
- Motor IPX5

- Chemical kit lance extension
- 7m high pressure hose
- 2.5m power cable & plug



Interpump Cleanmatic CL24RK Electric Pressure Washer

			Part No.	Volts	kW	PSI	Kg		
ž	7 160	CL24RK	230	1.75	2320	12.2			
LECTRIC	Lpm Bar		EWE - 'Equivalent Washing Effect' of rotary nozzle head. Pump pressure = 90 Bar.						
۳			Dimensions 520L x 225W x 360H mm						

- Interpump axial pump
- Two piece lance assembly
- Rotin rotary nozzle head
- Motor IPX5

Chemical kit lance extension

- 7m high pressure hose
- 2.5m power cable & plug



Interpump Boxjet & Turbo15 Electric Pressure Washers

	Part No.	Volts	kW	PSI	Kg
55	Turbo15	110	1.36	800	18.5
m Bar	Dimensions	s 362L >	(240W)	x 235H	mm
		55 Turbo15	55 Turbo15 110	55 Turbo15 110 1.36	55 Turbo15 110 1.36 800

<u>o</u>		
H	8	70
EC	Lpm	Bar
뮵	•	

Part No.	Volts	kW	PSI	Kg		
Boxjet	230	1.68	1015	18.5		
Dimensions 362L x 240W x 235H mm						

- Interpump 51 series pump
- Integrated controlset & bypass
- Integrated chemical injector
- Motor IPX5

- Two piece lance assembly
- 8m high pressure hose
 - 2.5m power cable & plug (Not Turbo15)



Interpump Quicky Electric Pressure Washer

<u>o</u>		
벁	10	100
S C	Lpm	Bar
급	_p	

Part No.	Volts	kW	PSI	Kg		
Quicky	230	2.65	1450	28		
Dimensions 405L x 240W x 235H mm						

- Interpump 51 series pump
- Integrated controlset & bypass
- Integrated chemical injector
- Motor IPX5

- Two piece lance assembly
- 8m high pressure hose
- 2.5m power cable & plug





	•	•						
<u>ပ</u>			Part No.	Volts	kW	Amps	PSI	Kg
2	10	100	T10100M	230	2.65	11.5	1450	43.5
ELEC	Lpm	Bar	Dimens	ions 86	60L x 40	00W x 8	75H m	m

- Interpump 51 series pump
- Interpump KR100 controlset
- Integrated chemical injector
- Thermoplastic wheeled trolley
- Motor Class F IPX5
- Chemical tank, lance & hose holder
- Two piece lance assembly
- 8m high pressure hose
- 5m power cable



INTERPUMP Electric Pressure Washers

Interpump TX Series Electric Pressure Washer

ELECTRIC	12 Lpm	100 Bar
----------	-----------	------------

Part No.	Volts	kW	Amps	PSI	Kg
TX12100M	230	2.2	13.6	1450	43
Dimensions 860L x 400W x 875H mm					



Part No.	Volts	kW	Amps	PSI	Kg
TX15150M	415	4	8.5	2175	43
Dimensions 860L x 400W x 875H mm					

- Interpump 44 series pump
- Integrated controlset & bypass
- Integrated chemical injector
- Chemical tank, lance & hose holder
- Two piece lance assembly
- 8m high pressure hose
- 5m power cable
- Motor Class F IPX5



Interpump TSX Series Electric Pressure Washer

12	100
Lpm	Bar

Part No.	Volts	kW	Amps	PSI	Kg
TSX12100M	230	2.2	13.6	1450	43
Dimensions 860L x 400W x 875H mm					

Part No.	Volts	kW	Amps	PSI	Kg
TSX15150M	415	4	8.5	2175	43
Dimensions 860L x 400W x 875H mm					

- Interpump 44 series pump
- Auto stop/start with 30s delay
- Integrated controlset & bypass
- Integrated chemical injector
- Motor Class F IPX5

- Chemical tank, lance & hose holder
- Two piece lance assembly
- 8m high pressure hose
- 5m power cable



Interpump TX Series Electric Pressure Washer

<u>o</u>		
TR	12	100
E	Lpm	Bar
ш	•	

Part No.	Volts	kW	Amps	PSI	Kg	
TX300-12100M	230	3	14	1450	62	
Dimensions 706L x 430W x 860H mm						

- Interpump 63 series pump
- Flexible coupling & flange
- Auto stop/start with 20s delay
- Integrated pressure regulator
- Integrated chemical injector
- Integrated chemical tank & hose reel
- Two-piece lance assembly
- 8m high pressure hose
- 5m power cable
- Motor Class F IPX5



Interpump TX Series Electric Pressure Washer

Lpm	250 Bar
-----	------------

Part No.	Volts	kW	Amps	PSI	Kg
TX500-15250M	415	9	17	3625	92
Dimensions 825L x 495W x 860H mm					

ELECTRIC The	200 Bar
--	------------

Part No.	Volts	kW	Amps	PSI	Kg
TX500-21200M	415	9	17	2900	92
Dimensions 825L x 495W x 860H mm					

- Interpump 47 series pump
- Flexible coupling & flange
- Auto stop/start with 20s delay
- Integrated pressure regulator
- Integrated chemical injector
- Integrated chemical tank & hose reel
- Two-piece lance assembly
- 15m high pressure hose
- 5m power cable
- Motor Class F IPX5



